

800 SERIES



PRESSURE WASHERS / SINCE 1970

FEATURES

4 to 5 GPM @ 2000 to 3000 PSI
Stainless Steel Coil Skin
5 - 10 HP



HOT WATER

ELECTRIC

BELT DRIVE

Upright, oil fired burner delivers high efficiency and maintains constant temperature using diesel fuel, kerosene or home-heating oil

50-ft. length of high-pressure hose for ease in cleaning around a large area

Protective cabinet contains water resistant electrical box

Float tank helps maintain constant water pressure and flow while helping to prevent sediment from entering the machine's components

Forklift slots for easy lifting

Rust-proof, removable, non-contaminating polyethylene fuel tank includes fuel gauge in cap

Wide wheel base for stability, but 28" width easily fits through doors

Easily removable **cover** provides protection and easy access to components

35-ft. power cord with safety **Ground Fault Circuit Interrupter (GFCI breaker)** *single phase only

Beefy casters for easy movement

12" solid rubber tires for easy maneuvering; eliminates risk of flats

On board **wand and cord storage**

Adjustable upstream detergent injection ensures high-pressure sudsing for better cleaning

Stainless-steel coil skin provides extra durability to withstand the elements

Pressure relief valve protects the machine and user from thermal expansion

Simple, easy-to-use control panel includes adjustable thermostat

Hose-reel slot accepts swivel or stationary reels for ease in hose management and storage

Reliable, energy efficient **oil burner** is built to provide years of trouble free service

Hotsy-designed **Triplex Pumps** carry a 7-year limited warranty and **Heater Coil** carries a 5-year warranty

U.S. Design Patent No. 726,382 S



Optional Detergent Bucket Bracket



OPTIONS FOR 800 SERIES

Auto Start/Stop Kit

Thermal Shutdown Kit

Time Delay Shutdown


8" Oil-Fired Vent Regulator

360° Pivot Reel, 100'

360° Pivot Reel, 200'

Pneumatic Wheel

Detergent Bucket Bracket

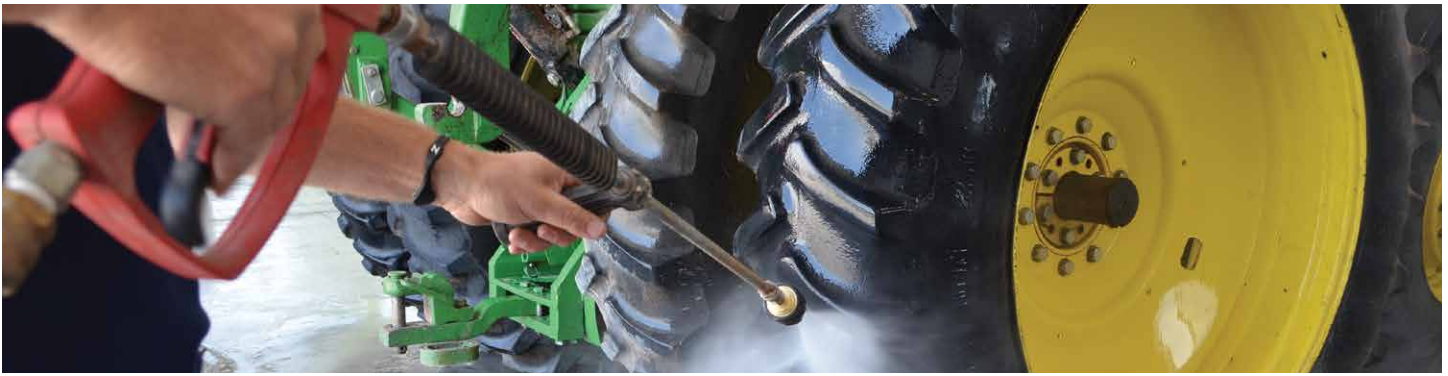

800 SERIES

Hot-Water **ELECTRIC** Models

RUGGED DESIGN, MANEUVERABILITY & MASSIVE CLEANING POWER!

■ Oil-Fired ■ 4 to 5 GPM @ 2000 to 3000 PSI ■ 1725 to 3450 Motor RPM


MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
821	1.109-120.0	4.0	2300	6.2	3450	208/1	33	Oil	381,000	HM4045R.3	51"x28"x51"	632
843	1.109-122.0	4.0	2000	5	1725	230/1	29	Oil	381,000	HM4030R.3	51"x28"x51"	622
845	1.109-124.0	4.0	2000	5	1725	460/3	10	Oil	381,000	HM4030R.3	51"x28"x51"	691
851	1.109-125.0	4.0	3000	8.2	3450	208/1	44	Oil	381,000	HM4045R.3	51"x28"x51"	675
853	1.109-127.0	4.0	3000	7.5	1725	230/1	37	Oil	381,000	HM4030R.3	51"x28"x51"	665
854	1.109-128.0	4.0	3000	7.5	1725	230/3	25	Oil	381,000	HM4030R.3	51"x28"x51"	665
855	1.109-129.0	4.0	3000	7.5	1725	460/3	14	Oil	381,000	HM4030R.3	51"x28"x51"	665
856	1.109-130.0	4.0	3000	8.2	3450	575/3	11	Oil	381,000	HM4045R.3	51"x28"x51"	680
873	1.109-131.0	5.0	3000	10	1725	230/1	42	Oil	404,000	HM4030R.3	51"x28"x51"	670
874	1.109-132.0	5.0	3000	10	1770	230/3	29	Oil	404,000	HM4030R.3	51"x28"x51"	675

DETERGENTS



To clean like a pro, you need to include detergents. Hotsy offers a full line of detergents for cleaning grease, dirt, road grime, aluminum, sanitation and so much more. Our detergents help you clean faster and save money.

PARTS & ACCESSORIES



Clean faster and more efficiently with pressure washer accessories like flat surface cleaners and turbo nozzles.

SERVICE



Hotsy factory-trained technicians keep your equipment running with on-site or in shop maintenance and tune-ups. Plus, we repair all brands.



The Pressure Washer The Pros Use.
EST. 1970

HOTSY.COM

Tel: 800.525.1976

Fax: 888.880.9631

Email: info@hotsy.com

VISIT US ONLINE

Facebook/Instagram HotsyCleaningSystems

LinkedIn Hotsy-Corp

Twitter TheHotsyMan

YouTube HotsyCleaningSystems

Get Hotsy Email Bit.ly/GetHotsy

© 2023 Kärcher North America

P/N HOT_800 Effective 05/23

NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We meet the CETA testing specs for machine performance at +_10% and in some cases are tighter within +_ 5% of listed specifications.

Specifications & product descriptions subject to change without notice. Hotsy's manufacturing facilities have established and apply a quality and environmental management system to be ISO 9001:2008 and ISO 14001:2001 certified.

Distributed by:

Hotsy Cleaning Equipment, Inc.

2732 Old Austin Peay Hwy.

Memphis, TN 38128

(901) 379-0550

hotsyofmemphis@bellsouth.net